4800 Series Narrow Plate Brass Door Furniture




A slimline, rectangular brass plate that adds style to your choice of lever.

Application

Designed for use with Lockwood Selector and Synergy Series short and standard backset mortice locks.

Additionally there are functions that are designed to work with Lockwood 3540 Series short backset mortice deadbolts.

Note: Certain lever designs are not compatible on short backset assemblies due to interference with the door stop. Refer to the backset suitability page at the end of this section.



							D		81	
빈			6	п	C	-	1 110 1	<u>A</u> 1	п.	r
	u	\mathbf{U}	ч	ч	L	ч.		C.	 u	

Door Thickness	External plates are supplied with fixing screws to suit door thickness between 32 and 50mm. For thicker doors, please refer to the brass furniture thicker doors page at the end of this catalogue section.						
Dimensions	185 x 26 x 11.5mm						
Fixing	Plates are designed to fit back to back. If outside plate is specified with concealed fixing, then the inside plate must be visible fixed.						
Handing	Plates are not handed; levers may be reversed by removing the stop screw, except for handed levers and functions as shown in the ordering procedure at the end of this section.						
Decorative Finishes	Standard Finish: Satin Chrome Brushed (SC) Non Standard Finishes: Chrome Plate (CP) Polished Brass (PB) Polyester Powdercoat (PC)* Special Finishes: Aged Brass (AG) Architectural Bronze (AZ) Architectural Bronze Unlaqured (AU) Antique Copper (AC) Oil Rubbed Bronze (ORB) Polished Brass Unlaqured (BU) Satin Brass (SB) Satin Brass Unlacquered (SBU)						

Turn Functions Adjustable Tailbar Turn functions feature a unique mechanism that automatically adjusts the length of the tail bar to suit a particular door thickness.

* Refer to the end of this catalogue for detailed images of all decorative finishes that suit this range.

Standards and Compliance

Ø

4600 Series has been successfully tested up to 4 hours with a fire rated Lockwood mortice lock on fire door assemblies (depending on type of doorset) in accordance with Australian Standard AS1905.1:2005, Fire Resistant Doorsets.

4800 Series lever sets have been successfully tested to conform with Level D8 (500,000 cycles) under

D8 Lever Do (500,000 cycle) – Australian Standard AS4145.2-2008, Locksets and hardware for doors and windows.



4800 Series in brushed satin chrome finish has been successfully tested to conform with Level C10 (1000 hours) under Australian Standard AS4145.2-2008, Locksets and hardware for doors and windows.

4800 Series is designed, assembled and customised in Australia to suit the requirements of the Australian Market.




4800 Series includes levers and turns (as shown) that meet the requirements of AS1428.1-2009, Design for access and mobility.



Plates and Functions

(See page 17 and 18 for detailed ordering procedure table and part numbers)

To suit 3780 Series Mortice Locks 4800/4900

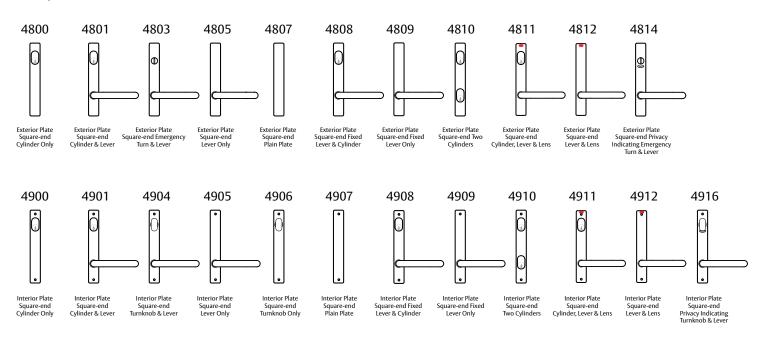





4941


Interior Plate Interior Plate Square-end Square-end Disabled Privacy Indicating Accessible Turnknob Emergency Turn & Lever & Lower Cylinder

Interior Plate led Square-end Privacy ob Indicating Disabled Accessible Turnknob & Lever


Note: Refer to page 18 for images of levers and knob styles available.





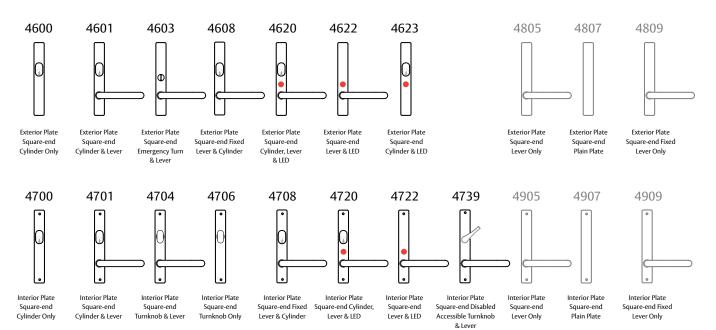

To suit 3540 Series Motice Locks



Square-end Lever Only

Square-end Lever Angled Up 45°

Note: Refer to page 18 for images of levers and knob styles available.



11

Functions 05, 07 & 09 use

4800 / 4900 plate versions